

产品参数表 (Product Datasheet)

产品型号 (Product Type) : 202-AMT040-0404 (AMT Tweeter气动式高音)

技术规格 (SPECIFICATIONS)

Nominal impedance Zn 4.0 Ω \pm 15%
 Dc resistance Re 3.2 Ω \pm 10%
 Resonance Frequency fs 3.5 KHz
 Sensitivity spl 90.0 dB \pm 3dB
 Frequency Range 3.5KHz ~ 40kHz

功率 (Power handling)



100 h RMS noise test (IEC) 15.0 W
 Longterm Max System Power (IEC) 30.0 W
 EC 268-5 noise signal is used for the powertest
 Lowest Recommend Crossover \geq 4.5 KHz

产品材料 (Product Material)

Front Panel Material ALumium Black
 Diaphragm Material KAPTON
 Conductive Line Material Alumium foil
 Magnet Material Neodymium

Net Weight 105.0 g/pc

产品图片 (Product Photos)

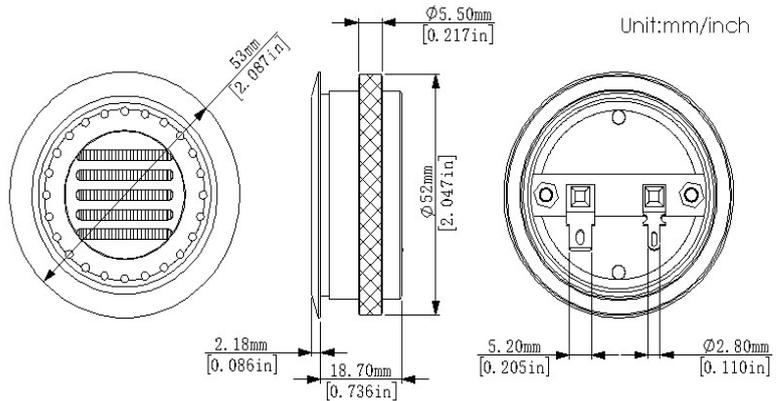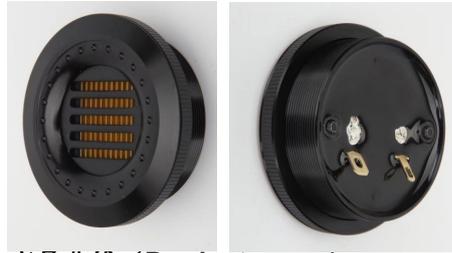

产品曲线 (Product curve)

